

LED VAPOR TIGHT JNL-VT0450

JANALITE®

FEATURES AND SPECIFICATIONS



Construction

- Whole PC material body, excellent stress and UV resistance. Waterproof, dust-proof and anti-corrosion 4FT and 8FT Options

Electrical

- Input Voltage: 120-277vac
- IP 65 waterproof grade
- Wattage and CCT tun-able
- High lumen efficient 125lm/w on average
- Motion sensor, emergency function for option

Applications

- Offices, retail, supermarket, schools, subway & train station, warehouse, healthcare, residential, and hospitality applications

Installation

- Hanging and ceiling installation

Listing

- Comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL

Warranty

- 5-year limited warranty


Specs at a Glance	* Nominal Wattage (Switchable)	
Configuration	JNL-VT0450	JNL-VT0880
CCT (K)	5CCT Selectable: 3500K-4000K-5000K-5700K-6500K	
Wattage (W)	25W/30W/35W/40W/ 50W	40W/50W/60W/70W/80W
Efficacy (LPW)	125lm/w	
Size	4FT	8FT
CRI	>80	
Input Voltage	120-277V AC	
Operating Temp	-20°C-45°C	
Certifications	ETL DLC 5.1 Premium	ETL
Warranty	5-year limited warranty	

LED VAPOR TIGHT

JANALITE®

Ordering information

SKU	SIZE	WATTAGE	CCT	ACCESORIES & SENSORS	INPUT VOLTAGE
JNL-VT0450	4 FT	25W-30W-35W-40W-50W	3500K-4000K-5000K-5700K-6500K	Motionn Sensor & Emergency Backup	120-277Vac
JNL-VT0860	8 FT	40W-50W-60W-70W-80W	3500K-4000K-5000K-5700K-6500K	Motionn Sensor & Emergency Backup	120-277Vac

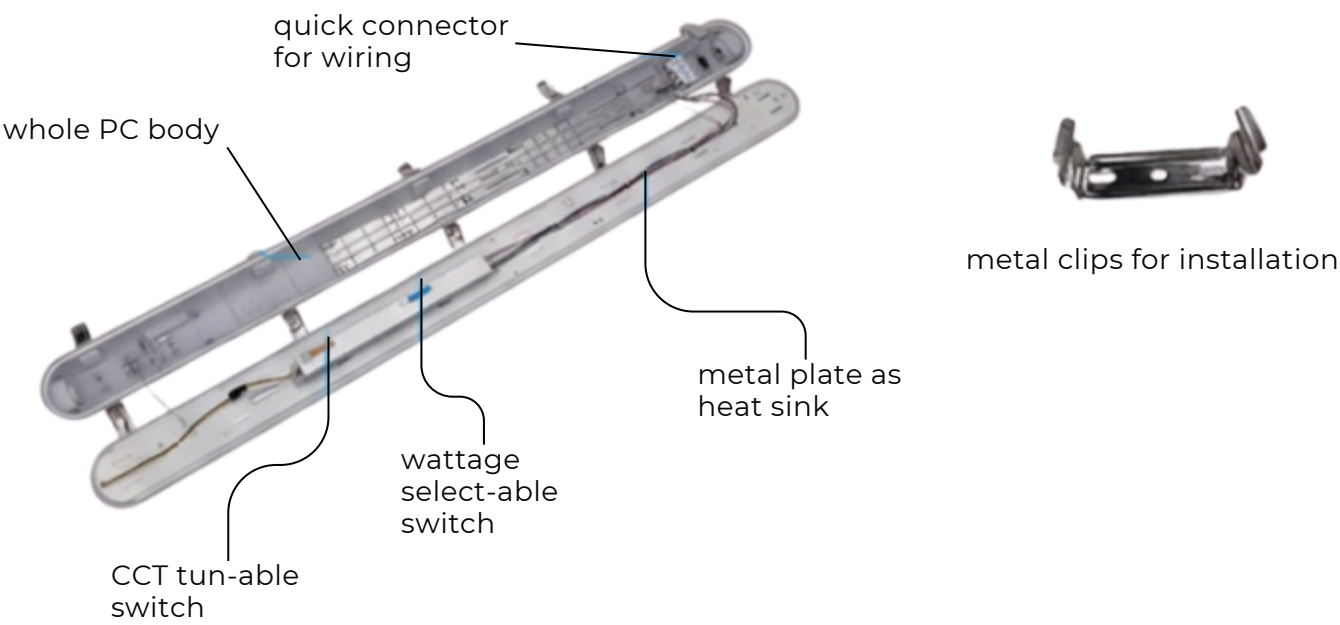

LED VAPOR TIGHT

JANALITE®

LENGTH	WIDTH	HEIGHT
1200mm/47"	95mm/3.74"	80mm/3.15"
2400mm/94"	95mm/3.74"	84mm/3.15"

ACCESSORIES



Metal clips

- Stainless steel material
- 2pcs for 4FT light, 4pcs for 8FT light



Connection terminal

Waterproof IP65
Lead the connection wires inside the lamp



Metal hook

- Stainless steel material
- For hanging light
- 2pcs for 4FT light, 4pcs for 8FT light



Screws bag


All the screws will be used for installation are packed in this bag

INSTALLATIONS

Slide the switches on the driver to select the desired CCT and wattage before installation.

Dimming Wiring Diagrams




This vapor tight light is compatible with 0-10V output dimming controls.

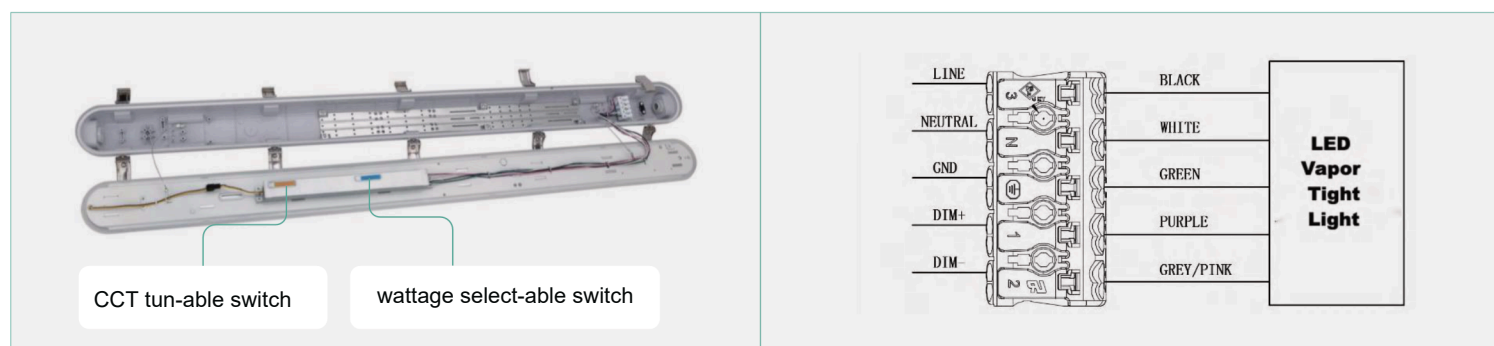

LED VAPOR TIGHT

JANALITE®

Surface Mounting

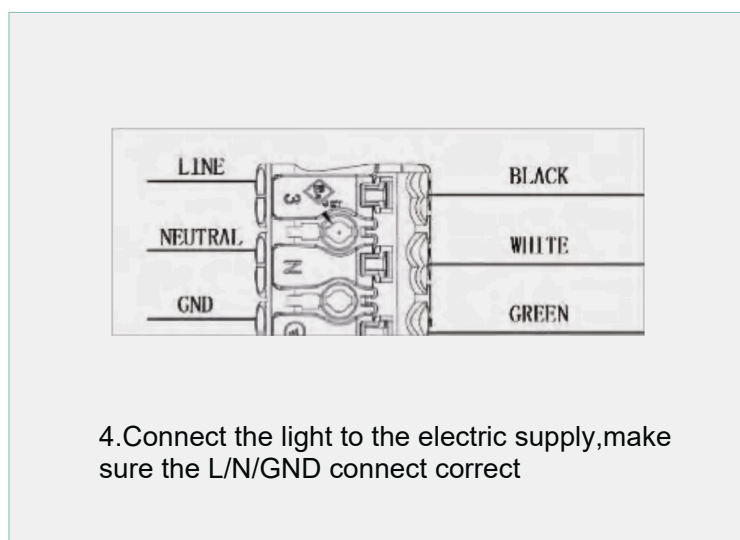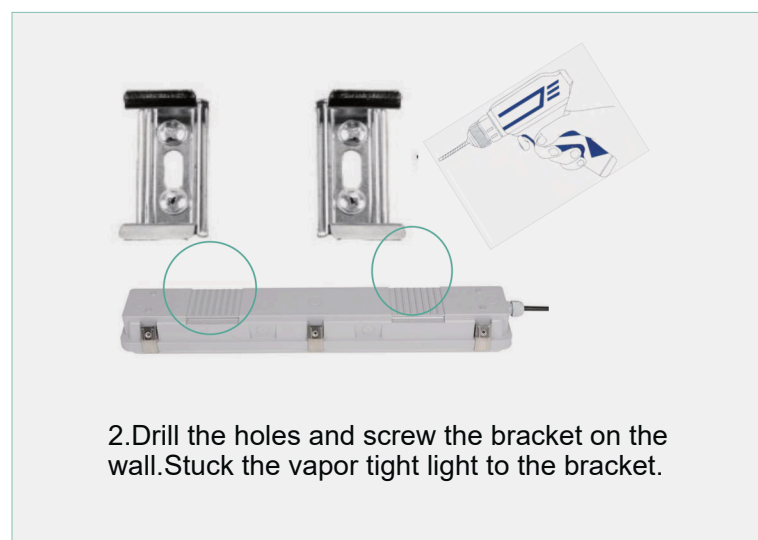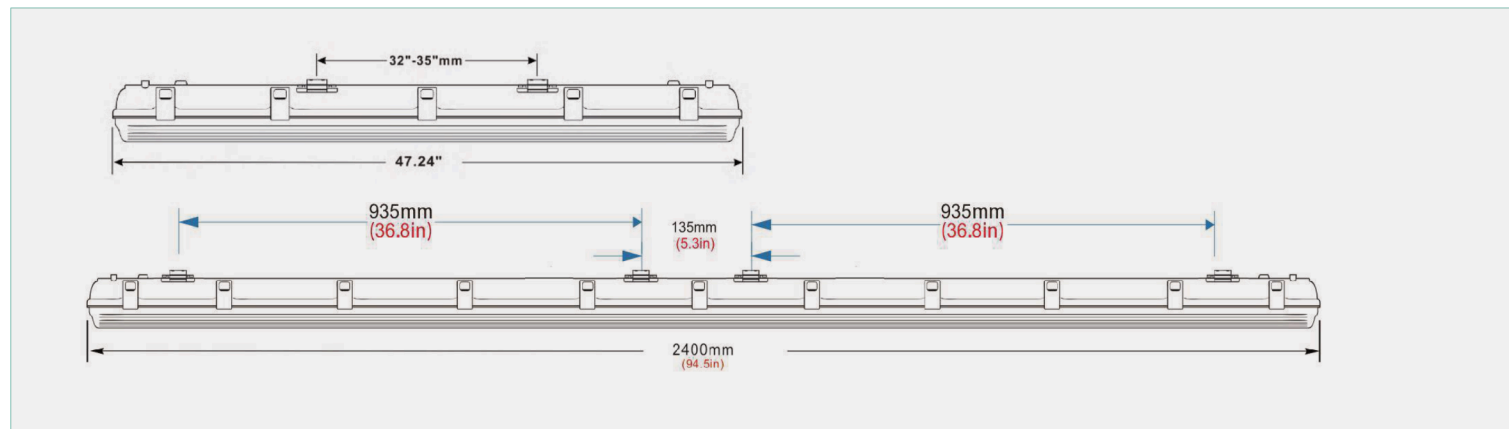

Packing Info



SIZE	CARTON SIZE (IN)	N.W. (LBS)	G.W. (LBS)	QTY/CTN	20'GP (PCS)	40'GP (PCS)
4 FT	47.83" x 12.6" x 7.87"	11.2	14	6 pcs	2166	4404
8 FT	94.88" x 12.64" x 8.46"	23.4	28.59	6 pcs	1014	2058